

EXHIBIT B – List of Manufacturers copy of petition submitted to:

Mr. Michael W. Gordon
Vice President, Engineering
Bradford White Corporation
200 Lafayette Street
Middleville, MI 49333-9492

Mr. William T. Harrigill
V.P. Prod. Dev. & Res. Eng.
Rheem Water Heater Division
Rheem Manufacturing Company
101 Bell Road
Montgomery, AL 36117-4305

Mr. George Kusterer
Technical Field Representative
Bock Water Heaters
220 Chestnut Street
Kutztown, PA 19530-1504

Mr. Tim Shellenberger
Sr. Vice President – Product Engineering
American Water Heater Company
1100 E. Fairview Ave.
Johnson City, TN 37605

Mr. Jim Smelcer
Vice President of Engineering
Lockinvar Corporation
300 Maddox Simpson Parkway
Lebanon, TN 37090-5349

Mr. Drew Smith
Director, Engineering
A.O. Smith Water Products Company
25731 Highway 1
McBee, SC 29101-9304

Mr. John Paisley
Director of Engineering
GSW Water Heating Company
599 Hill Street West
Fergus, Ontario N1M2Y4
CANADA

[FR Doc. 04–12036 Filed 5–26–04; 8:45 am]
BILLING CODE 6450–01–C

DEPARTMENT OF ENERGY**Office of Energy Efficiency and
Renewable Energy****10 CFR Part 431****Energy Conservation Program for
Certain Industrial Equipment: Granting
of the Application for Interim Waiver
and Publishing of the Petition for
Waiver of Rheem Water Heaters From
the DOE Uniform Federal Test
Procedure for Measuring Efficiency of
Commercial Water Heaters (Case No.
WH–017)**

AGENCY: Office of Energy Efficiency and
Renewable Energy, Department of
Energy.

ACTION: Notice of petition for waiver and
solicitation of comments; grant of
interim waiver.

SUMMARY: Today's notice grants an Interim Waiver to Rheem Water Heaters (RWH) and publishes RWH's Petition for Waiver from the existing Department of Energy (the Department or DOE) test procedure for commercial water heaters. RWH claims that it cannot demonstrate compliance with the new energy efficiency requirements for commercial water heating products that became effective October 29, 2003, for some of its water heater models, using the current test procedure. The test procedure for measuring compliance with the new standards was published as a proposed rule on August 9, 2000, and has not yet been finalized. As part of today's action, the Department is also soliciting comments, data, and information with respect to the Petition for Waiver.

DATES: The Department will accept comments, data, and information with respect to this Petition for Waiver on or before June 28, 2004.

ADDRESSES: You may submit comments, identified by Case No. WH–017, by any of the following methods:

- Federal eRulemaking Portal: <http://www.regulations.gov>. Follow the instructions for submitting comments.

- E-mail: commercialwaterheaterwaiver@ee.doe.gov. Include Case No. WH–017 in the subject line of the message.

- Mail: Ms. Brenda Edwards-Jones, U.S. Department of Energy, Building Technologies Program, Mailstop EE–2J, Commercial Water Heater Waiver, Case No. WH–017, 1000 Independence Avenue, SW., Washington, DC 20585–0121. Telephone: (202) 586–2945. Please submit one signed paper original.
- Hand Delivery/Courier: Ms. Brenda Edwards-Jones, U.S. Department of Energy, Building Technologies Program, Room 1J–018, 1000 Independence Avenue, SW., Washington, DC 20585.

To read background documents or comments received, go to the U.S. Department of Energy, Forrestal Building, Room 1J–018 (Resource Room

of the Building Technologies Program), 1000 Independence Avenue, SW., Washington, DC, (202) 586-9127, between 9 a.m. and 4 p.m., Monday through Friday, except Federal holidays. Please call Ms. Brenda Edwards-Jones at the above telephone number for additional information regarding visiting the Resource Room. Please note: The Department's Freedom of Information Reading Room (formerly Room 1E-190 at the Forrestal Building) is no longer housing rulemaking materials.

FOR FURTHER INFORMATION CONTACT:

Mohammed Khan, U.S. Department of Energy, Building Technologies Program, Mail Stop EE-2J, Forrestal Building, 1000 Independence Avenue, SW., Washington, DC 20585-0121, (202) 586-7892; e-mail:

Mohammed.Khan@ee.doe.gov; or Francine Pinto, Esq., or Thomas DePriest, Esq., U.S. Department of Energy, Office of General Counsel, Mail Stop GC-72, Forrestal Building, 1000 Independence Avenue, SW., Washington, DC 20585-0103, (202) 586-9507; e-mail: *Francine.Pinto@hq.doe.gov*, or *Thomas.DePriest@hq.doe.gov*.

SUPPLEMENTARY INFORMATION: Title III of the Energy Policy and Conservation Act (EPCA) sets forth a variety of provisions concerning energy efficiency. Part B of Title III (42 U.S.C. 6291-6309) provides for the "Energy Conservation Program for Consumer Products Other than Automobiles." Part C of Title III (42 U.S.C. 6311-6317) provides for a program entitled, "Certain Industrial Equipment," which is similar to the program in Part B, and which includes commercial air conditioning equipment, package boilers, water heaters, and other types of commercial equipment.

Today's notice involves commercial equipment under Part C, which specifically provides for definitions, test procedures, labeling requirements, energy conservation standards, and information and reports from manufacturers. With respect to test procedures, Part C generally authorizes the Secretary of Energy to prescribe test procedures that are reasonably designed to produce results that reflect energy efficiency, energy use and estimated annual operating costs, and that are not unduly burdensome to conduct. (42 U.S.C. 6314)

For commercial water heaters, EPCA provides that DOE's test procedure shall be that generally accepted industry test procedure developed or recognized by the Air-Conditioning and Refrigeration Institute (ARI) or by the American Society of Heating, Refrigerating and Air

Conditioning Engineers (ASHRAE), as referenced in ASHRAE/Illuminating Engineers Society (IES) Standard 90.1 and in effect on June 30, 1992. (42 U.S.C. 6314(a)(4)(A)) This statute also provides that if this industry test procedure is amended, the Secretary of Energy shall amend DOE's test procedure to be consistent with the amended industry test procedure, unless the Secretary determines that such a modified test procedure does not meet the statutory criteria. (42 U.S.C. 6314(a)(4)(B))

The current DOE test procedure that is applicable to this equipment is the one referenced in the version of ASHRAE/IES 90.1 in effect in 1992, the American National Standards Institute (ANSI)/Canadian Standards Association (CSA) Standard Z21.10.3-1990. In response to ASHRAE's amendment to this standard, the Department issued a Notice of Proposed Rulemaking to adopt an updated test procedure for commercial water heaters, ANSI/CSA Standard Z21.10.3-1998, which is referenced in ASHRAE/IES Standard 90.1-1999. (65 FR 48852, August 9, 2000) The Department however, has not taken final action with respect to the proposed rule. Thus, the Standard Z21.10.3-1990 remains the applicable test procedure.

In January 2001, the Department adopted the ASHRAE 90.1-1999 energy efficiency standards for commercial gas-fired and oil-fired water heaters as new Federal efficiency standards effective October 29, 2003. (66 FR 3335, January 12, 2001.) Because the Department has not yet issued a final rule on its proposal for an updated test procedure for commercial water heaters, commercial water heater manufacturers must demonstrate compliance with the new energy efficiency standards using the existing DOE test procedure.

The Department is required to make adjustments to its regulations, as necessary, to prevent special hardship, inequity or unfair distribution of burdens. (42 U.S.C. 7194) Currently, the Department has regulatory provisions in 10 CFR 430.27 and 10 CFR 431.29 allowing a waiver from test procedure requirements for covered consumer products and electric motors. There are no specific waiver provisions for other covered commercial equipment. However, the Department proposed waiver provisions for covered commercial equipment on December 13, 1999 (64 FR 69597), as part of the commercial furnace test procedure rule, and the Department expects to publish a final rule codifying this process in 10 CFR 431.201. Until that occurs, DOE will use the waiver provisions for

consumer products and electric motors for waivers involving other covered commercial equipment. These waiver provisions are substantively identical.

The waiver provisions allow the Assistant Secretary for Energy Efficiency and Renewable Energy to waive temporarily the test procedures for a particular basic model when a petitioner shows that the basic model contains one or more design characteristics that prevent testing according to the prescribed test procedures, or when the prescribed test procedures may evaluate the basic model in a manner so unrepresentative of its true energy consumption as to provide materially inaccurate comparative data. (See 10 CFR 430.27 (a)(1), 10 CFR 431.29 (a)(1).) Waivers generally remain in effect until final test procedure amendments become effective, thereby resolving the problem that is the subject of the waiver.

DOE will grant an Interim Waiver if it determines that the applicant will experience economic hardship if the Application for Interim Waiver is denied, if it appears likely that the Petition for Waiver will be granted, and/or the Assistant Secretary determines that it would be desirable for public policy reasons to grant immediate relief pending a determination on the Petition for Waiver. (See 10 CFR 430.27 (g).) An Interim Waiver remains in effect for a period of 180 days or until DOE issues its determination on the Petition for Waiver, whichever is sooner, and may be extended for an additional 180 days, if necessary.

On September 2, 2003, RWH filed a Petition for Waiver and Application for Interim Waiver from the "DOE Uniform Federal Test Procedure for Measuring Efficiency of Commercial Water Heaters," referenced in the version of ASHRAE 90.1 in effect in 1992, ANSI/CSA Z21.10.3-1990. It requested permission to use ANSI/CSA Z21.10.3-1998 as an alternate test procedure for its water heating products having the following model numbers: *50-98, *75-125, *82-156, *37-160, *76-180, *37-200, *76-200, *91-200, *100-200**, *72-250**, *100-250*, 100-270**, *72-300**, *91-300**, *100-310**, *65-360**, *65-400**, *85-400**, *100-400**, GX90-550**, GX90-640**, GX90-715**, GX90-500**, GX90-600**, and GX90-680** for which, RWH states, "The * may be replaced by a 'G', 'GN', 'T' or 'TN' which represents trade brands of Rheem (G) and Richmond (T). (N) represents a natural gas only model. The ** may be replaced by an 'A' which represents ASME."

In its petition, RWH seeks a waiver from the applicable test procedure because RWH asserts that the current DOE test procedure is incompatible with the new DOE energy efficiency standards, which became effective on October 29, 2003. RWH also states that the above-specified models of water heating products do not meet the new energy efficiency requirements using the current test procedure.

Due to the fact that DOE has experienced delays in publishing a final rule for the test procedure for commercial water heating products, and also recognizes that certain basic models of commercial water heaters are allegedly not compliant with the new energy efficiency standards absent a waiver from the current DOE test procedure, the Department has decided to grant this interim waiver to ensure that such models do not become noncompliant. The Department believes the appropriate alternate is the test procedure published in the August 9, 2000, proposed rule, which incorporates by reference ANSI/CSA Standard Z21.10.3-1998, the applicable industry standard referenced by ASHRAE/IES Standard 90.1-1999. EPCA requires the Department, for certain commercial equipment, to amend its test procedures consistent with amended ASHRAE or ARI industry test procedures. (42 U.S.C. 6314(4)(B))

The most significant differences between the protocols presented in the proposed August 9, 2000, DOE test procedure and the current DOE test procedure, ANSI/CSA Z21.10.3-1990, are the duration requirements for the Standby Loss Test; other differences are minimal. The ANSI/CSA Standard Z21.10.3-1998 test procedure specifies that the Standby Loss Test shall continue until the first cutout occurs following 24 hours from the time data collection is initiated. This 24-hour requirement was created to reduce test burdens; the duration requirement specified in the ANSI/CSA Z21.10.3-1990 test procedure is 48 hours minimum. However, because it is possible for some water heaters to not experience the cutout until days beyond

the 24 hour limit, a newer industry test standard, ASHRAE Standard 118.1-2003, which ASHRAE Standard 90.1 currently does not reference, includes a 48-hour limit to preclude undue test burdens. The inclusion of a 48-hour provision in the DOE test procedure was suggested by the Gas Appliance Manufacturers Association (GAMA) and the California Energy Commission (CEC) in comments submitted in response to the August 9, 2000, proposed rule. The Department agrees with the need for the additional test duration requirement and believes that the evidence in the record is clear and convincing that without the 48-hour termination provision, the standby loss test procedure in the ANSI/CSA Standard Z21.10.3-1998 can pose undue burdens on manufacturers. Therefore, this waiver authorizes the use of ANSI/CSA Standard Z21.10.3-1998, and regarding the Standby Loss Test in section 2.10 of ANSI/CSA Standard Z21.10.3-1998, adds the requirement that the standby loss test duration shall be the shorter of either, (1) until the first cutout following 24 hours from the initiation of data collection, or (2) until 48 hours from the initiation of data collection if the water heater is not in the heating mode at that time.

After careful consideration of all the material that was submitted by RWH and others, the Department has decided to grant this interim waiver for the public policy reason that it is not desirable to make certain models of commercial water heaters noncompliant with the applicable energy efficiency standards given that the appropriate test procedure is not yet finalized. Hence, it is ordered that:

(1) The "Application for Interim Waiver" filed by RWH is hereby granted for the basic models of water heating equipment as follows: *50-98, *75-125, *82-156, *37-160, *76-180, *37-200, *76-200, *91-200, *100-200**, *72-250**, *100-250*, 100-270**, *72-300**, *91-300**, *100-310**, *65-360**, *65-400**, *85-400**, *100-400**, GX90-550**, GX90-640**, GX90-715**, GX90-500**, GX90-600**, and GX90-680** for which,

RWH states, "The * may be replaced by a 'G', 'GN', 'T' or 'TN' which represents trade brands of Rheem (G) and Richmond (T). (N) represents a natural gas only model. The ** may be replaced by an 'A' which represents ASME."

(2) RWH is permitted the use of ANSI/CSA Standard Z21.10.3-1998 to establish compliance with the efficiency standards for its water heating products manufactured after October 29, 2003. Further, regarding the Standby Loss Test, section 2.10 of ANSI/CSA Standard Z21.10.3-1998, the use of an additional test duration requirement is permitted as follows: The standby loss test duration shall be the shorter of either, (i) until the first cutout following 24 hours from the initiation of data collection, or (ii) until 48 hours from the initiation of data collection if the water heater is not in the heating mode at that time.

This Interim Waiver is based upon the presumed validity of statements and all allegations submitted by the company. This Interim Waiver may be removed or modified at any time upon a determination that the factual basis underlying the Application is incorrect.

This Interim Waiver shall remain in effect for a period of 180 days after issuance or until DOE acts on the Petition for Waiver, whichever is sooner, and may be extended for an additional 180-day period, if necessary. DOE is hereby publishing the "Petition for Waiver" in its entirety. (See 10 CFR 430.27(b).) The Petition contains no confidential information. The Department solicits comments, data, and information respecting the Petition.

Any person submitting written comments to DOE concerning either the Petition for Waiver or Interim Waiver must also send a copy of such comments to the petitioner. 10 CFR 430.27(b)(1)(iv) and 430.27(d).

Issued in Washington, DC, on May 21, 2004.

David K. Garman,

Assistant Secretary, Energy Efficiency and Renewable Energy.

BILLING CODE 6450-01-P


Rheem Water Heaters

Ozzie Missoum
Engineering Manager, Commercial Products

September 2, 2003

Mr. David Garman
Assistant Secretary, Energy Efficiency and Renewable Energy
United States Department of Energy
1000 Independence Avenue, SW
Washington, DC 20585

Re: Petition for Waiver and Application for Interim Waiver

Dear Sir:

Rheem Water Heaters respectfully submits this Petition for Waiver and Application for Interim Waiver pursuant to Title 10 CFR Part 431.29. Waiver is requested from the uniform federal test procedures for measuring efficiency of commercial water heaters referenced in 42 U.S.C. Section 6314(a)(4)(A). This petition affects the following water heater models:

Base Model Number	Fuel Type	Rated Storage Volume (Gallons)	Input Rate (MBTUH)
*50-98	LP/Nat. Gas	50	98
*75-125	LP/Nat. Gas	75	125
*82-156	LP/Nat. Gas	82	156
*37-160	LP/Nat. Gas	37	160
*76-180	LP/Nat. Gas	76	180
*37-200	LP/Nat. Gas	35	199.9
*76-200	LP/Nat. Gas	76	199.9
*91-200	LP/Nat. Gas	91	199.9
*100-200 **	LP/Nat. Gas	100	199.9
*72-250 **	LP/Nat. Gas	72	250
*100-250 *	LP/Nat. Gas	100	250
*100-270 **	LP/Nat. Gas	100	270
*72-300 **	LP/Nat. Gas	72	300
*91-300 **	LP/Nat. Gas	91	300
*100-310 **	LP/Nat. Gas	100	310
*65-360 **	LP/Nat. Gas	65	360
*65-400 **	LP/Nat. Gas	65	399.9
*85-400 **	LP/Nat. Gas	85	399.9
*100-400 **	LP/Nat. Gas	100	399.9
GX90-550 **	Natural Gas	90	550
GX90-640 **	Natural Gas	90	640
GX90-715 **	Natural Gas	90	715
GX90-500 **	LP Gas	90	500
GX90-600 **	LP Gas	90	600
GX90-680 **	LP Gas	90	680

* The * may be replaced by a "G", "GN", "T" or "TN" which represents trade brands Rheem (G) and Richmond (T). (N) represents a natural gas only model.

** The ** may be replaced by an "A" which represents ASME.

September 2, 2003

Page 2 of 4


In the January 12, 2001 Federal Register, DOE published a final rule adopting ASHRAE Standard 90.1-1999 energy efficiency standards for 18 product categories of commercial heating and air conditioning equipment as uniform national standards pursuant to the Energy Policy and Conservation Act (EPCA), as amended by the Energy Policy Act of 1992 (EPACT). These new mandatory national minimum standards are applicable to commercial water heating products manufactured after October 29, 2003 (i.e. two years after the October 29, 2001 effective date specified in ASHRAE Standard 90.1-1999).

The Notices of Proposed Rules (NOPRs) to adopt new test procedures corresponding with the new efficiency standards related to boilers and water heaters were issued August 9, 2000, but the final rules have still not been issued. This delay in implementation of the new test procedures forces water heater manufacturers to continue to test products to the current federal test procedures in order to meet the new federal efficiency standards.

Due to the incompatibility of the current test procedures with the new federal efficiency standards, we are unable to meet the new efficiency requirements using the current test procedure for these products. Exhibit A demonstrates the differences between the current federal test procedures and those contained in ASHRAE 90.1-1999. Pursuant to 42 U.S.C. Section 6314 (a)(4)(B), DOE is required by law to adopt ANSI Z21.10.3-1998, *Volume III, Storage Water Heaters, With Input Ratings Above 75,000 Btu Per Hour, Circulating and Instantaneous*, as the federal test procedure for commercial water heaters unless DOE can justify by clear and convincing evidence adoption of an alternative test procedure for these products. We respectfully request that DOE allow use of ANSI Z21.10.3-1998 to test commercial water heaters.

Manufacturers who market similar products are being sent a copy of this petition. If any further information is required, please contact me.

Sincerely,

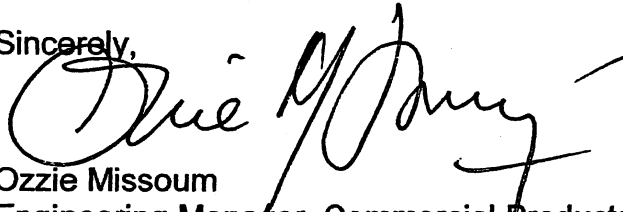

Ozzie Missoum
Engineering Manager, Commercial Products

Attachments: Exhibit A
Exhibit B

September 2, 2003

Page 3 of 4

EXHIBIT A – Comparison of Thermal Efficiency and Standby Loss Measurements Referenced by EPACT and ASHRAE 90.1-1999

	ANSI/CSA Z21.10.3-1990 (EPACT)	ANSI/CSA Z21.10.3-1998 (ASHRAE 90.1-1999)
Thermal Efficiency (E_T)		
ΔT	70 F	70 F
Duration	30 min	30 min
Standby Loss (S)		
Tstat (° F)	160 ± 5	140 ± 5
Troom (° F)	75 ± 10	75 ± 10
Vary (° F)	± 7	± 7
Duration	Not less than 48 hours If on at 48 hours finish cycle	24 hours + next cutout
Units	%/hour	%/hour
Start	After 1 cutout	After 2 cutouts

September 2, 2003

Page 4 of 4

EXHIBIT B – List of Manufacturers Copy of Petition Submitted To

Mr. Timothy J Shellenberger
Sr. V. P. Product Engineering
American Water Heater Company
1100 E. Fairview Ave.
Johnson City, TN 37605

Mr. George Kusterer
Technical Field Representative
Bock Water Heaters
220 Chestnut Street
Kutztown, PA 19530-1504

Mr. Michael W. Gordon
V. P. Engineering
Bradford White Corporation
200 Lafayette Street
Middleville, MI 49333-9492

Mr. John Paisley
Director of Engineering
GSW Water Heating Company
599 Hill St. West
Fergus, Ontario N1M 2X1
Canada

Ms. Patricia H. Aperson
Design/Engineering
Heat Transfer Products
120 Braley Rd.
East Freetown, MA 02717-1111

Lennox Industries, Inc.
1100 E. Fairview Ave.
Johnson City, TN 37605

Mr. Jim Smelcer
V. P. Engineering
Lochinvar Corporation
300 Maddox Simpson Parkway
Lebanon, TN 37090-5349

Reco Industries
Box 417
West Columbia, SC 29177

Mr. Drew Smith
V. P. Engineering
A.O. Smith Water Products Co.
25731 Highway 1
McBee, SC 29101-9304

State Industries, Inc.
500 By-Pass Rd.
Ashland City, TN 37015

U.S. Craftmaster Water Heaters
1100 E. Fairview Ave.
Johnson City, TN 37605